


# KRAFTUBE, INC

## Kraftube Full Port Standard Ball Valves

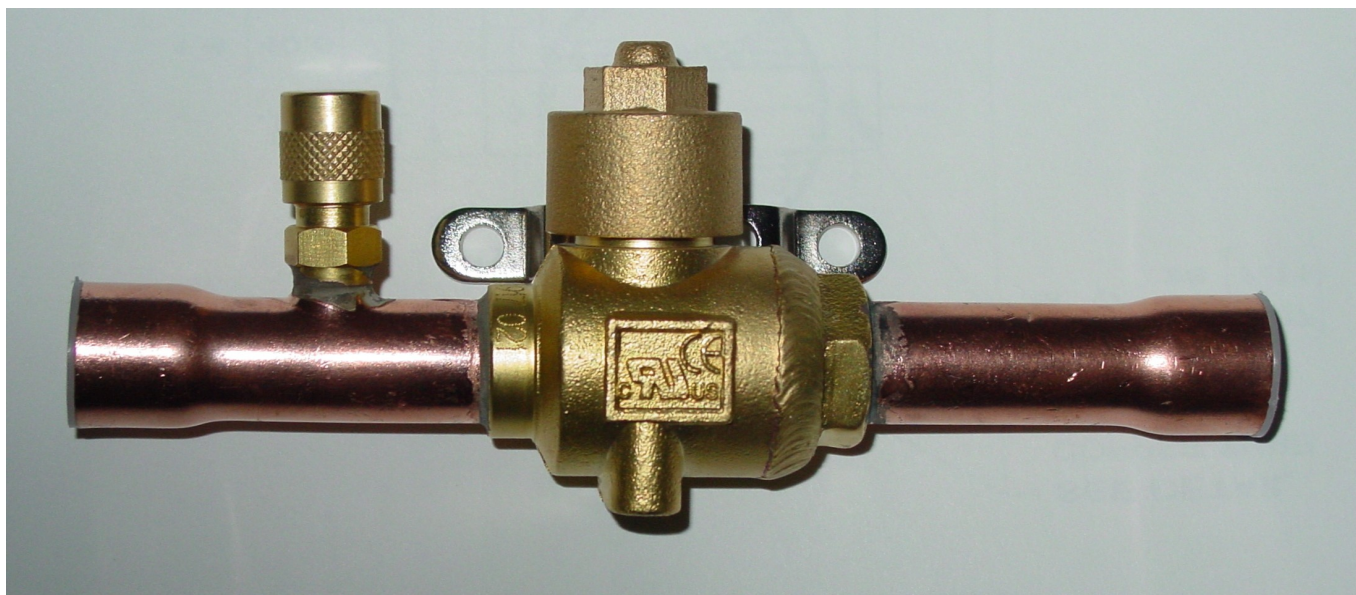

Kraftube, Inc has a complete line of full port UL approved refrigeration ball valves, in several styles, depending on your engineered application.

Our ball valves have dual Teflon O rings to seal the shaft and can withstand maximum working pressures up to 500 PSI.

The minimum/maximum working temperature is minus 50C to plus 140C with a minimum burst pressure of 2500 PSI suitable for all refrigerants including R410A.

925 E. CHURCH AVE.  
REED CITY, MI  
49677-9196.

To Order Call Customer Service

**Phone: 231-832-5562**

**Extension 106-Sue**

**Fax: 231-832-2937**

**Web: [www.kraftube.com](http://www.kraftube.com)**

ISO 9001-2000

SIC CODE 34


NACE CODE DJ 28

EAC CODE 17

**PROVIDING  
SOLUTIONS TO  
DIFFICULT  
PROBLEMS**

# KRAFTUBE, INC

## Kraftube Full Port Standard Ball Valves

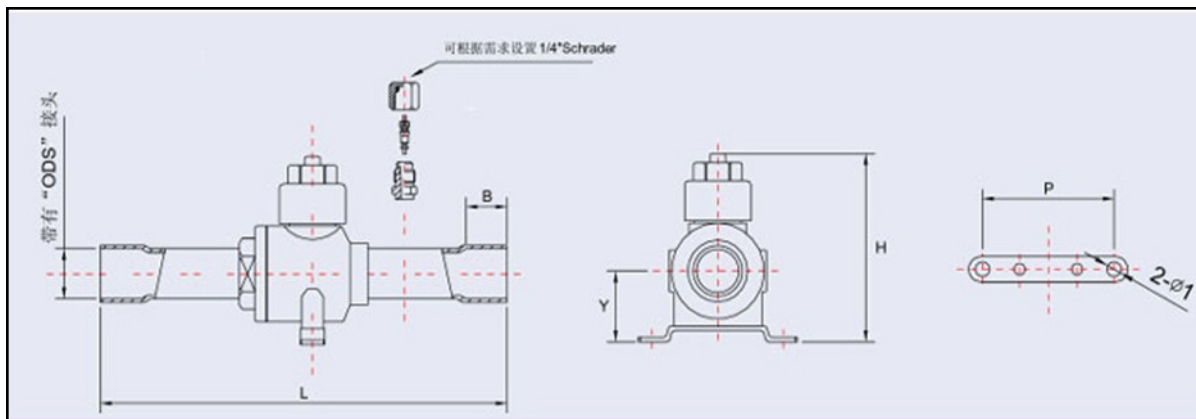

### SPECIFICATION

MODEL	mm	inch	ODS mm	B mm	H mm	L mm	Y mm	P mm	I mm
BV001	10	—	10	10	55	125	19	38.5	4.5
BV002	—	3/8"	10	10	55	125	19	38.5	4.5
BV003	12	—	10	10	58	128	20	43.5	4.5
BV004	—	1/2"	10	10	58	128	20	43.5	4.5
BV005	16	5/8"	12	12	67	150	24	47.5	5.5
BV006	18	—	15	15	74	165	28	52	5.5
BV007	—	3/4"	15	15	74	165	28	52	5.5
BV008	22	7/8"	20	20	83	190	31	59.5	6.5
BV009	28	—	20	20	95	210	35	69.5	6.5
BV010	—	1-1/8"	20	20	95	210	35	69.5	6.5
BV011	35	1-3/8"	25	25	100	245	35	—	—
BV012	42	—	25	25	124	280	46	—	—
BV013	—	1-5/8"	25	25	124	280	46	—	—
BV014	54	2-1/8"	30	30	135	320	51	—	—
BV015	67	2-5/8"	35	35	160	380	65	—	—
BV016	80	3-1/8"	40	40	210	420	85	—	—
BV017	102	4-1/8"	40	40	260	430	110	—	—

925 E. CHURCH AVE.  
REED CITY, MI  
49677-9196.

To Order Call Customer Service

Phone: 231-832-5562

Extension 106-Sue

Fax: 231-832-2937

Web: [www.kraftube.com](http://www.kraftube.com)

ISO 9001-2000

SIC CODE 34

NACE CODE DJ 28

EAC CODE 17

**PROVIDING  
SOLUTIONS TO  
DIFFICULT  
PROBLEMS**